



uniarch

A New Range by **uniview**

IP Video Surveillance

RESIDENTIAL | RETAIL | HOSPITALITY





introduction

Our aim is to become a global leader in IP video surveillance industry which endeavors to build a safer world by providing professional, reliable and innovative products and services.


Uniarch releases a new range of high-performance and cost-effective IP video surveillance products that offers unbeatable value and reliability.

The Uniarch range includes IP cameras and network video recorders. Ideal for small-to-medium applications such as all types of residential apartments and accommodation, child care, aged care and office buildings.



U-IPC-D114-PF28/40

4MP Network IR Fixed Dome Camera

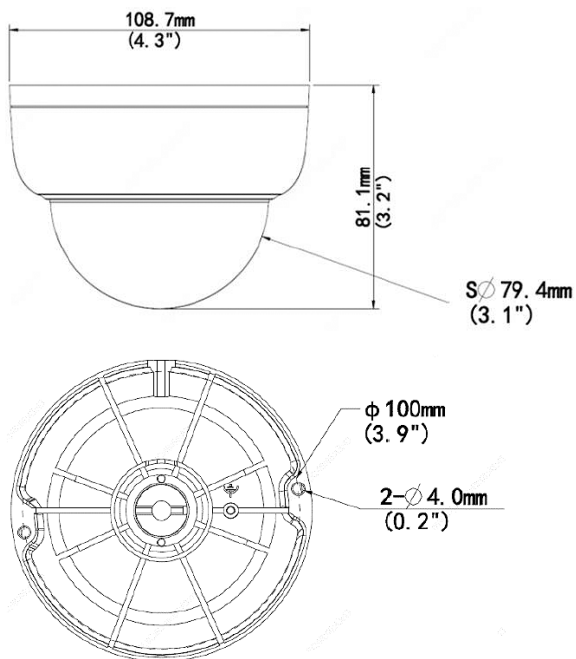

U-IPC-D114-PF28 (2.8mm Lens)

U-IPC-D114-PF40 (4.0mm Lens)

KEY FEATURES:

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network


- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of ±25%
- IK10 Vandal Resistant
- 2-Axis
- IP67

U-IPC-B114-PF28/40

4MP Mini Fixed Bullet Network Camera

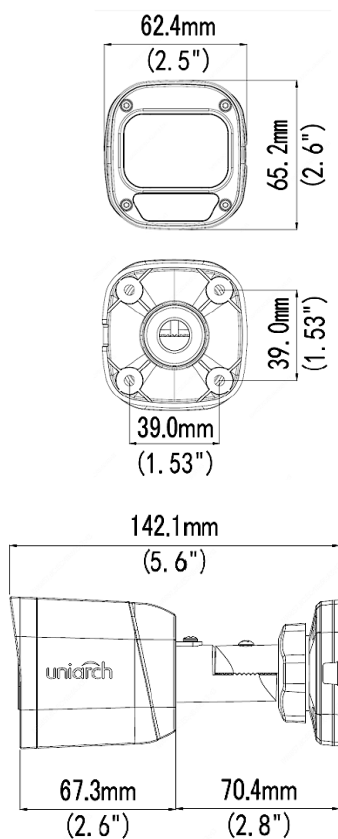

U-IPC-B114-PF28 (2.8mm Lens)
U-IPC-B114-PF40 (4.0mm Lens)

KEY FEATURES:

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network


- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- IP67

U-IPC-T118-DPF28/40

8MP Fixed Turret Network Camera

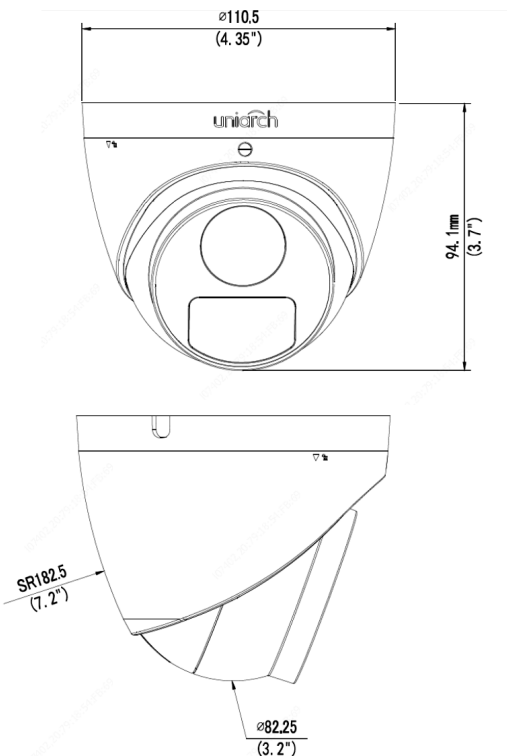

U-IPC-T118-DPF28 (2.8mm Lens)
U-IPC-T118-DPF40 (4.0mm Lens)

KEY FEATURES:

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)
- Triple Streams

Network


- ONVIF Conformance

Structure

- Wide temperature range: $-30^{\circ}\text{C} \sim 60^{\circ}\text{C}$ ($-22^{\circ}\text{F} \sim 140^{\circ}\text{F}$)
- Wide voltage range of $\pm 25\%$
- 3-Axis
- IP67

U-IPC-T114-PF28/40

4MP Fixed Turret Network Camera

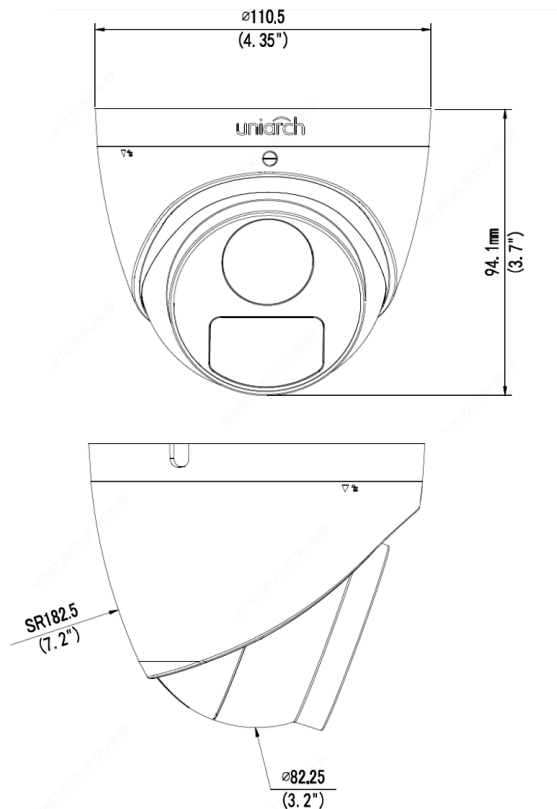

U-IPC-T114-PF28 (2.8mm Lens)
U-IPC-T114-PF40 (4.0mm Lens)

KEY FEATURES:

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network


- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- 3-Axis
- IP67

U-IPC-T115-PF28/40

5MP Fixed Turret Network Camera

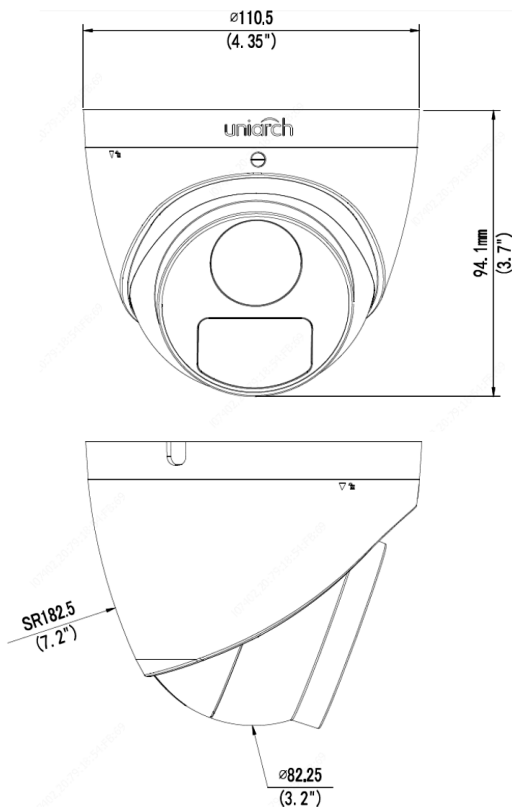

U-IPC-T115-PF28 (2.8mm Lens)
U-IPC-T115-PF40 (4.0mm Lens)

KEY FEATURES:

Optics

- Day/night functionality
- Smart IR, up to 30m (98ft) IR distance
- 3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network


- ONVIF Conformance

Structure


- Support PoE power supply
- Wide temperature range: $-30^{\circ}\text{C} \sim 60^{\circ}\text{C}$ ($-22^{\circ}\text{F} \sim 140^{\circ}\text{F}$)
- Wide voltage range of $\pm 25\%$
- 3-Axis
- IP67

U-NVR-104LX-P4

4CH 8MP H.265 NVR with PoE Switch

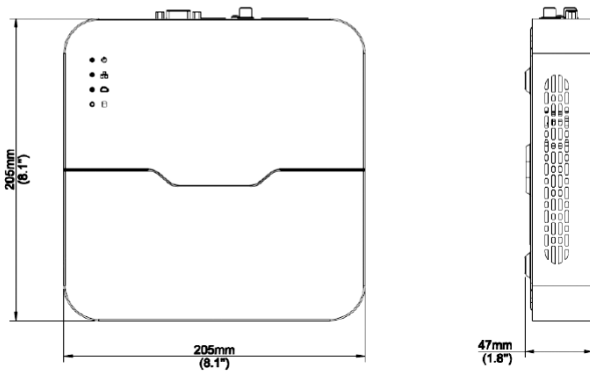

Rear Panel

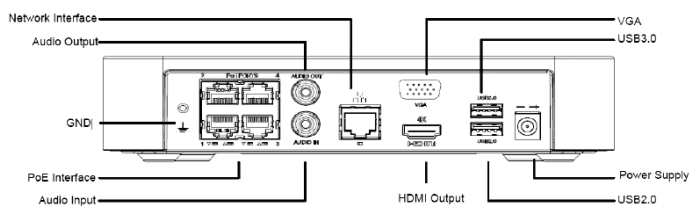


U-NVR-104LX-P4

FEATURES:


- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Plug & Play with 4 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD, up to 10 TB
- Support cloud upgrade

U-NVR-108LX-P8

8CH 8MP H.265 NVR with PoE Switch

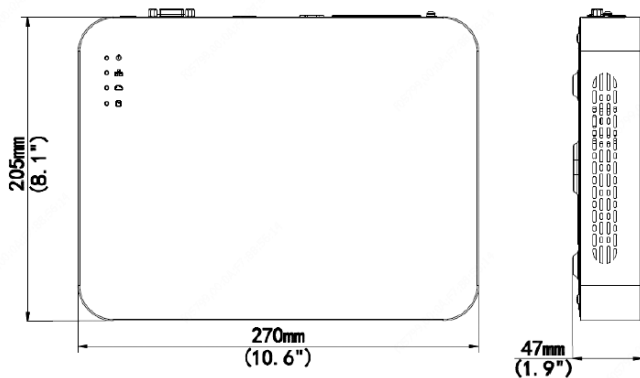

Rear Panel

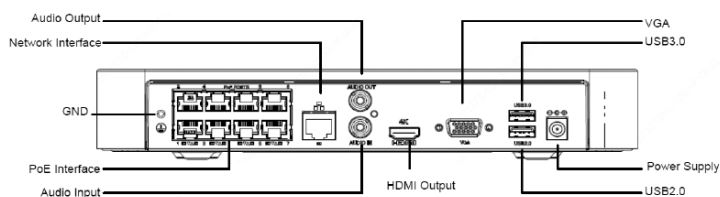

U-NVR-108LX-P8

FEATURES:

- Support Ultra 265 / H.265 / H.264 video formats
- 8-channel input
- Plug & Play with 8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S / Profile G / Profile T
- Support 1-ch HDMI / 1-ch VGA / HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD, up to 10 TB
- Support cloud upgrade



uniarch
A New Range by uniview



NSW
02 9749 5888
nsw@eos.com.au

VIC
03 9544 5633
vic@eos.com.au

QLD
07 3252 9272
qld@eos.com.au

WA
08 9249 5911
wa@eos.com.au

© 2020 EOS AUSTRALIA PTY LTD.

All rights reserved. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products.
EOS AUSTRALIA PTY LTD disclaims proprietary interest in the marks and names of others. This document is for informational purposes only.
EOS AUSTRALIA PTY LTD reserves the right to make changes without further notice to any products herein. The content provided is as is and without express or implied warranties of any kind.